



WiConnect DEVICE

WI-FI COMMUNICATION FOR YOUR SYSCAL/ELREC DEVICE

FOR THE SYSCAL JUNIOR/R1+/PRO SWITCH AND ELREC PRO SWITCH SYSTEMS*

The WiConnect device allows a wireless connection from your tablet, smartphone or laptop. Perform a Rs-Check, choose your sequence and acquisition parameters and start, stop, pause the acquisition or check the apparent resistivity pseudo-section from the confort of any shelter located around your Syscal/Elrec.

With the WiConnect device, download automatically your data. Save it to your cloud server or email it to your office for faster reporting.

The WiConnect device allow to control and dowload data from a webpage and can be used from any plateform (Windows, Android, Apple) and any device featuring a Wi-Fi connection.

New versions of most IRIS Instruments software allow for communicating by Wi-Fi (Prosys II, Electre Pro, Fieldview)



WI-FI REAL-TIME
COMMUNICATION

REMOTELY
CONTROLLED FROM
A WEBPAGE
(ANDROID,
WINDOWS, APPLE)

PERFORM RS-CHECK,
CHOOSE SEQUENCE

START/STOP/PAUSE
ACQUISITION

DOWNLOAD DATA ON
ANY SMARTPHONE,
TABLET, LAPTOP


SAVE DATA TO YOUR
CLOUD OR MAIL IT

IRIS INSTRUMENTS

1 Avenue Buffon
45100 Orléans, France
Phone : +33 238-638-100

www.iris-instruments.com

See measurements (current injected, voltage measured, quality factor, resistivity or resistivity pseudo-section) and battery levels in real-time on the webpage :

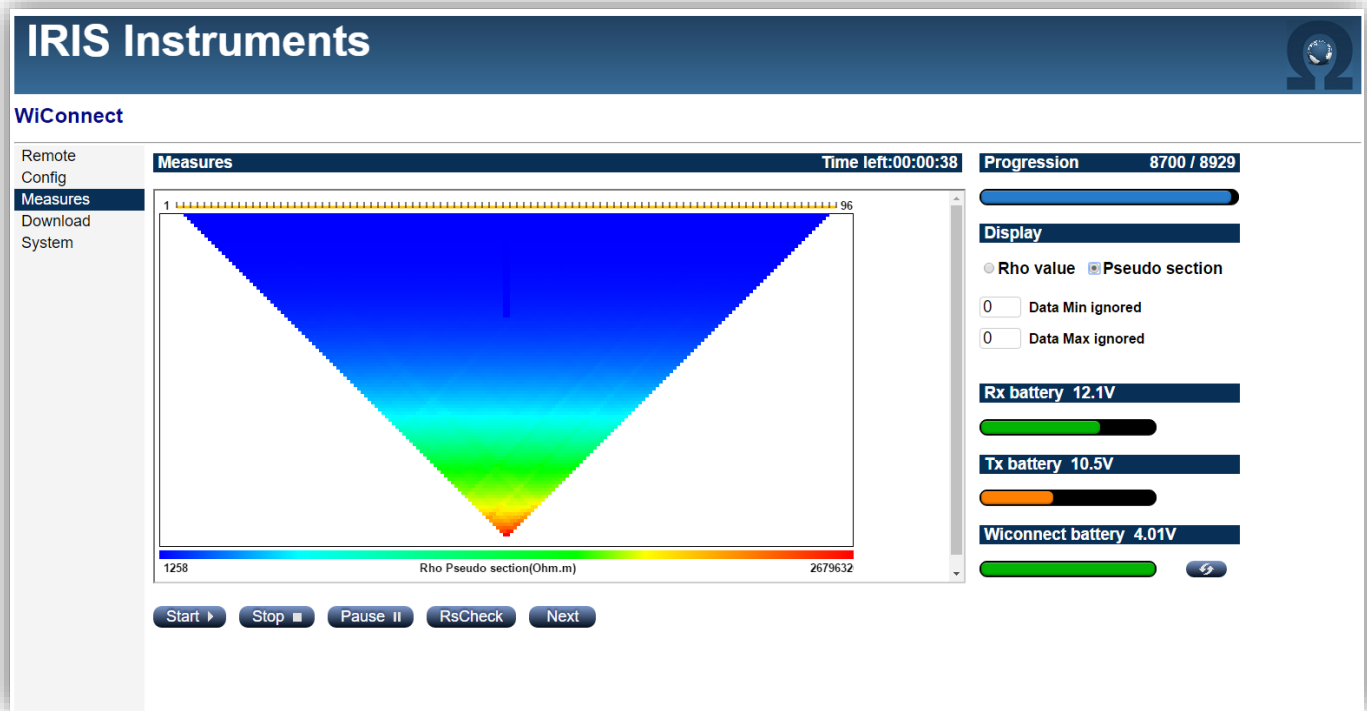

In addition, the [ProsysView](#) Android™ app is available for free on the Google Play to filter, visualize and export the pseudo-section and soundings of resistivity and chargeability after downloading the data on your Android smartphone or tablet.

*These features are only available for the Syscal Pro as well as the Syscal R1 Plus and Junior 2 channels dating after 2014. For the Syscal Junior and R1 Plus 1 channel, dating before 2014, only data transfer features are available.

